



BFTX

ROUND WALL MOUNTED FANS / Backward Curved

Fan Components and Material Properties

Square frame is electrostatic painted. The impeller is made of high quality galvanized sheet metal which is pressed against corrosion. All models have an external rotor motor with a closed structure and have air transport at max. 40°C. Designed to work on the wall. It can be operated in any position. On request, the motor can be produced as thermally protected against high temperature. The terminal box is supplied with the product as standard. Suction nozzle is compatible with duct diameters and can be connected by clamp.

Fan Structure

Designed to work between round channels. The fan blades are aerodynamically curved and provide regular flow. The fans are composed of backward sloping and infrequently arranged fins.

Benefits

It can be easily mounted to the desired surface from the holes on the frame. It has a strong air flow. Speed can be adjusted with speed control devices.

Speed Control


Optional control devices can be provided.

* Linear voltage regulator speed control can be done. (see BSC accessory)

Usage Areas

Round duct fans are used in low and medium volume ventilation requirements in duct systems where the application area is limited. It should be used with oil holding filter in oily environments.

Technical Drawing and Tables





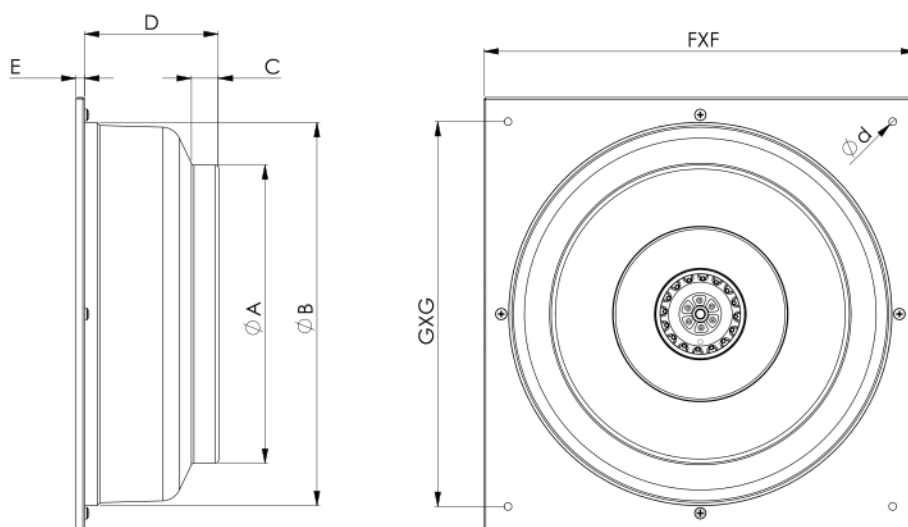


TYPE	ØA	ØB	C	D	E	F	G	d
BFTX 100	97	244	20	100	9	315	265	8
BFTX 150-B	147	270	24	105	9	400	350	8
BFTX 200-B	196	330	24	113	9	400	350	8
BFTX 250-B	246	330	24	116	9	400	350	8
BFTX 315-B	310	398	26	140	9	500	400	8

Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE	INSULATION CLASS	PROTECTION CLASS	WEIGHT
TYPE	V	Hz	W	(A)	(µF)	r.p.m	m³/h	dB(A)	Ins.cl.	IP	kg
BFTX 100	230	50/60	70	0,3	2	2600/2900	240/270	44	B	44	2,7
BFTX 150-B	230	50/60	85/100	0,37/0,45	2,5	2430/2530	420/440	46	B	44	3,6
BFTX 200-B	230	50/60	110/140	0,48/0,63	4	2650/2950	870/970	48	B	44	4,8
BFTX 250-B	230	50/60	160/225	0,73/1,02	6	2550/2675	1150/1200	47	B	44	5,3
BFTX 315-B	230	50/60	200/280	0,88/0,97	7	2550/2700	1750/1890	49	B	44	6,6

Sound Level Measured from 3m distance in room condition.

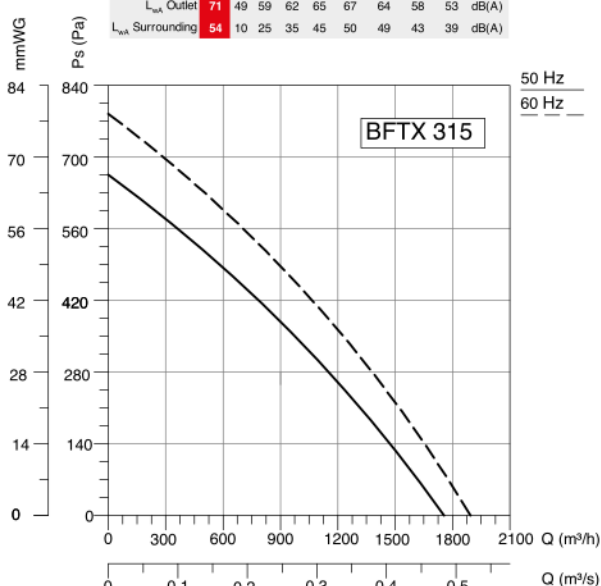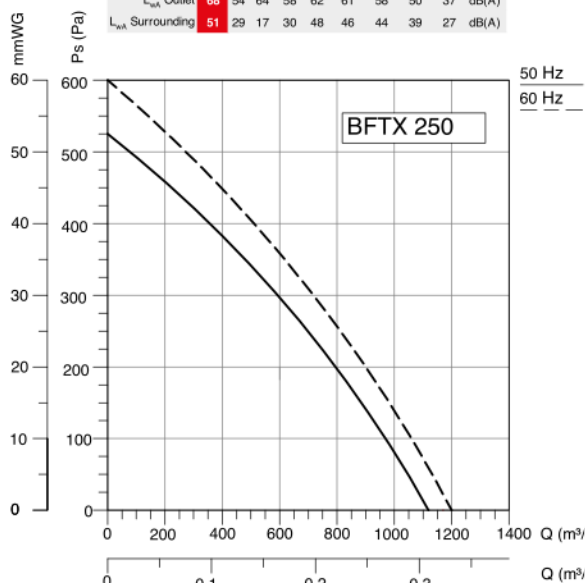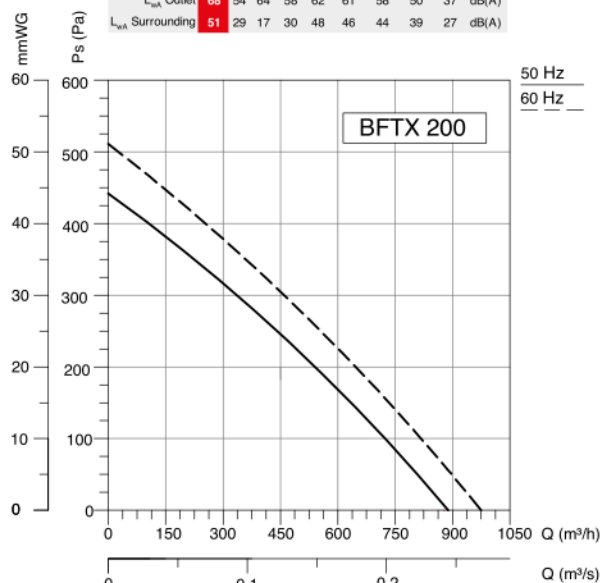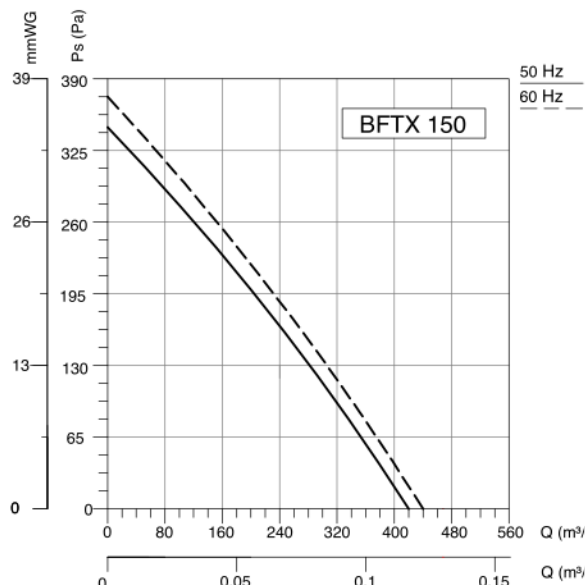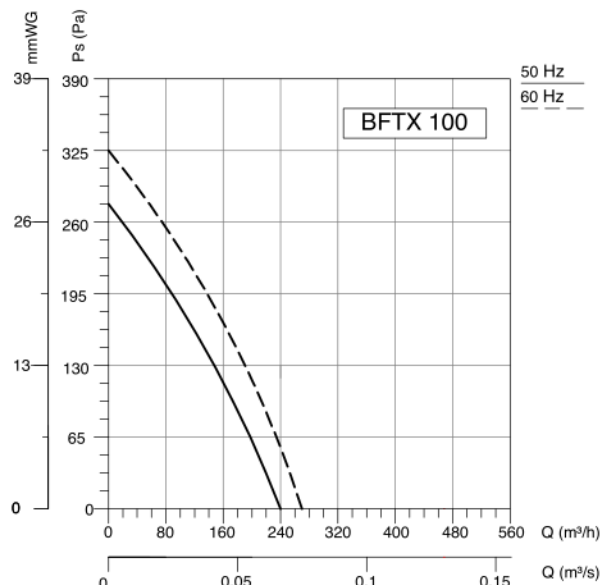

Accessories

