



EA


AXIAL BATHROOM FANS / **Standard**

It is safe with front louvre design. The panel is wider and tighter. This feature provides a robust mounting design. It is silent and corrosion resistant. Long life of the motor against environmental factors. Thermal protection.

Can be mounted on glass and wall.

It is used for small volume spaces, bath and toilet ventilation.

Technical Drawing and Tables

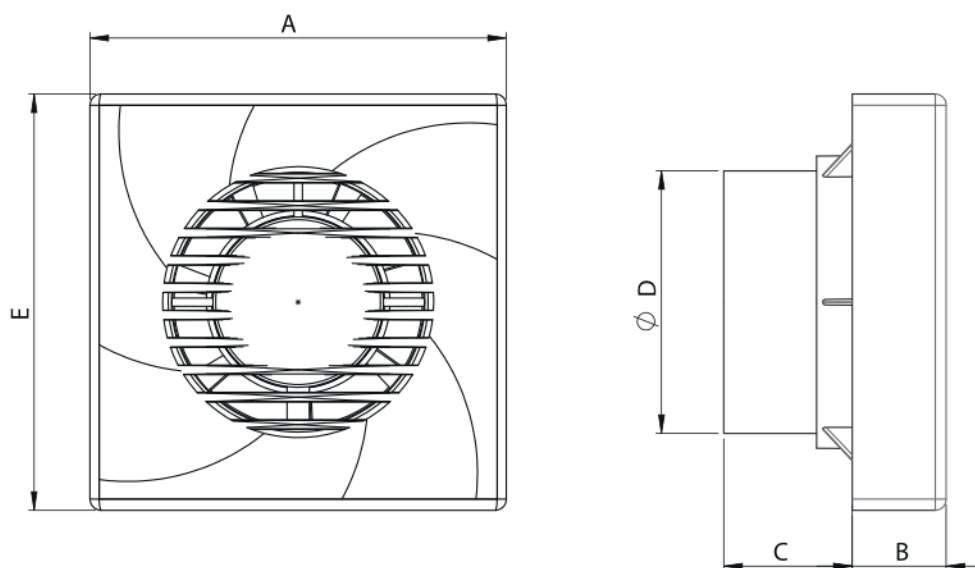


TYPE	A	B	C	D	E
EA 1010	149	32	59	97	149
EA 1219	170	32	59	118	170
EA 1530	200	38	59	145	200


Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE	INSULATION CLASS	PROTECTION CLASS	WEIGHT	PIECES IN BOX
TYPE	V	Hz	W	(A)	(μF)	r.p.m	m ³ /h	dB(A)	Ins.cl.	IP	kg	AD
EA 1010	230	50/60	13	0,09	-	2600	100	40	B	20	0,52	24
EA 1219	230	50/60	14	0,09	-	2400	200	41	B	20	0,6	20
EA 1530	230	50/60	21	0,13	-	2000	300	43	B	20	1,12	16


Sound Level Measured from 3m distance in room condition.

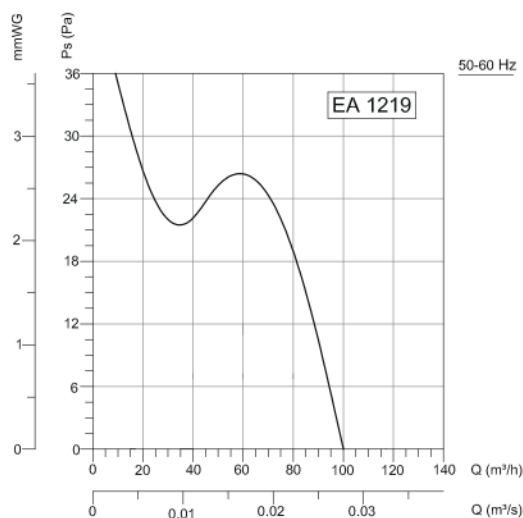

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L_{wA} Inlet	47	12	35	41	43	40	36	35	28	dB(A)
L_{wA} Outlet	56	37	49	52	52	42	39	34	26	dB(A)

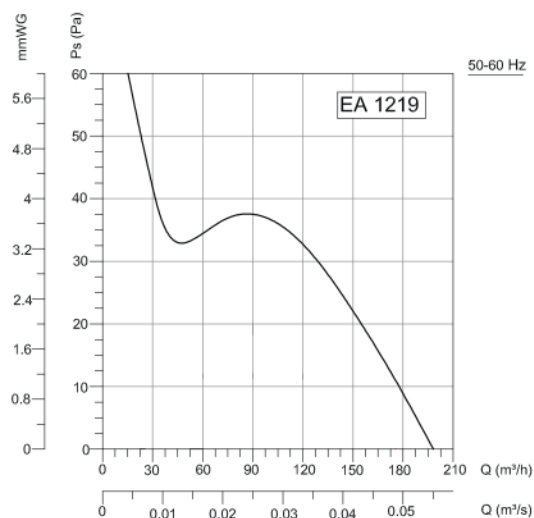

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L_{wA} Inlet	48	16	41	42	41	40	38	32	25	dB(A)
L_{wA} Outlet	59	56	52	53	50	43	41	30	23	dB(A)

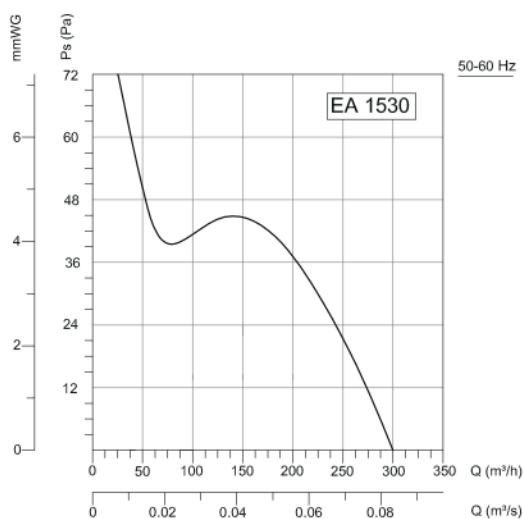

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L_{wA} Inlet	50	19	38	44	45	42	40	34	26	dB(A)
L_{wA} Outlet	57	35	49	55	49	42	41	32	21	dB(A)

Accessories



BSC

