




RVK F4

Kłapa zwrotna,
instalacja pionowa

z klasą odporności ogniowej F400

Charakterystyka strat ciśnień

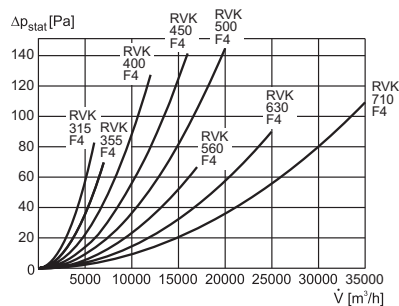

wymiary

Typ	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Waga [kg]	nr katalogowy
RVK 315 F4	355	315	8 x 45°	10	233	3,2	15439100
RVK 355 F4	395	355	8 x 45°	10	233	3,6	15439200
RVK 400 F4	450	400	8 x 45°	12	218	4,2	15439300
RVK 450 F4	500	450	8 x 45°	12	218	4,7	15439400
RVK 500 F4	560	503	12 x 30°	12	441	7,3	15439500
RVK 560 F4	620	563	12 x 30°	12	441	11,9	15439600
RVK 630 F4	690	630	12 x 30°	12	441	13,4	15439800
RVK 710 F4	770	710	16 x 22,5°	12	431	15,2	15439900
RVK 800 F4	860	800	16 x 22,5°	12	586	28,7	15773800
RVK 900 F4	970	900	16 x 22,5°	15	576	32,4	15775600
RVK 1000 F4	1070	1000	16 x 22,5°	15	576	36,8	15776800
RVK 1120 F4	1190	1120	20 x 18°	15	566	40,6	15783900
RVK 1250 F4	1320	1250	20 x 18°	15	566	45,9	15784800

