




## RVK H F4

Kłapa zwrotna,  
instalacja pozioma  
z klasą odporności ogniowej F400

Charakterystyka strat ciśnień

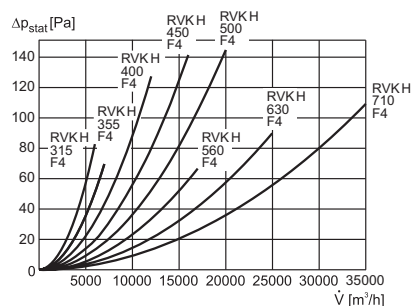

wymiary

| Typ           | A<br>[mm] | B<br>[mm] | C          | D<br>[mm] | E<br>[mm] | Waga<br>[kg] | nr<br>katalogowy |
|---------------|-----------|-----------|------------|-----------|-----------|--------------|------------------|
| RVK H 315 F4  | 355       | 315       | 8 x 45°    | 10        | 233       | 3,2          | 15567400         |
| RVK H 355 F4  | 395       | 355       | 8 x 45°    | 10        | 233       | 3,6          | 15566700         |
| RVK H 400 F4  | 450       | 400       | 8 x 45°    | 12        | 218       | 4,2          | 15566800         |
| RVK H 450 F4  | 500       | 450       | 8 x 45°    | 12        | 218       | 4,7          | 15566900         |
| RVK H 500 F4  | 560       | 500       | 12 x 30°   | 12        | 441       | 7,3          | 15567000         |
| RVK H 560 F4  | 620       | 560       | 12 x 30°   | 12        | 441       | 11,9         | 15567100         |
| RVK H 630 F4  | 690       | 630       | 12 x 30°   | 12        | 441       | 13,4         | 15567200         |
| RVK H 710 F4  | 770       | 710       | 16 x 22,5° | 12        | 431       | 15,2         | 15567300         |
| RVK H 800 F4  | 860       | 800       | 16 x 22,5° | 12        | 431       | 17,3         | 15942500         |
| RVK H 900 F4  | 970       | 900       | 16 x 22,5° | 15        | 421       | 19,6         | 15955700         |
| RVK H 1000 F4 | 1070      | 1000      | 16 x 22,5° | 15        | 576       | 36,8         | 15957400         |
| RVK H 1120 F4 | 1190      | 1120      | 20 x 18°   | 15        | 566       | 40,8         | 16399300         |
| RVK H 1250 F4 | 1320      | 1250      | 20 x 18°   | 15        | 566       | 45,8         | 16403000         |

