

RADYAL FANLAR

RADIAL FANS

UVS-GR Orta Basıncılı Radyal Fan

UVS-GR Medium Pressure Radial Fan



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.
YOU CAN VISIT OUR WEBSITE TO GET DETAIL-
LED INFORMATION ABOUT THE PRODUCT.

www.uvents.com.tr



* Metal Alt Şase Opsiyoneldir. / Metal Bottom Chassis is Optional.



ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE


Model	Voltaj (V)	Akım (A)	Power (kW)	RPM (d/d)	Airflow (m3/h)	Basınç (Pa)	Ses dB(A)	Ağırlık (Kg)
UVS-GR300	230/380	5/1.75	0.75	2.800	4.000	500	80	91
UVS-GR320	230/380	9.8/3.3	1.5	2.800	6.000	700	80	104
UVS-GR350A	230/380	13.5/4.5	2.2	2.800	6.500	900	80	145
UVS-GR350B	230/380	17.7/5.8	3	2.800	9.000	900	85	158
UVS-GR400A	380	7.9	4	2.800	10.000	1.300	85	175
UVS-GR400B	380	10.3	5.5	2.800	13.000	1.300	90	225
UVS-GR450A	380	13.6	7.5	2.800	15.000	1.500	90	240
UVS-GR450B	380	17	11	2.800	18.000	1.500	102	255
UVS-GR500A	380	26	15	2.800	21.000	1.700	108	325
UVS-GR500B	380	28	18.5	2.800	23.000	2.100	110	375

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	A	B	C	D	F
UVS-GR300	560	510	180	250	250
UVS-GR320	665	550	200	260	300
UVS-GR350A	720	600	250	280	320
UVS-GR350B	720	600	250	280	320
UVS-GR400A	820	685	270	330	350
UVS-GR400B	820	685	270	330	350
UVS-GR450A	840	700	270	370	400
UVS-GR450B	840	700	270	370	400
UVS-GR500A	850	785	330	410	450
UVS-GR500B	850	785	330	410	450

ÜRÜN DETAY ÇİZİMİ

/ PRODUCT DETAIL DRAWING

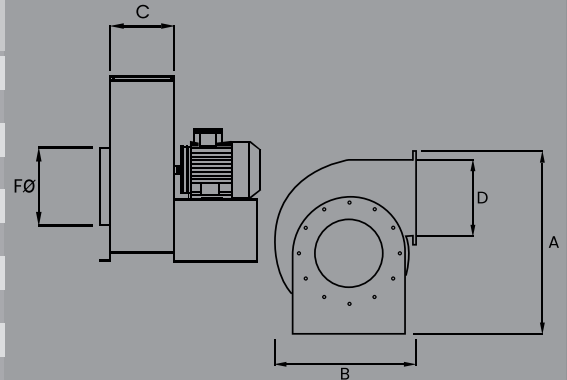

* Yukarıdaki tablodan yazan veriler mm cinsinden belirtilmiştir. / * The data written in the table above are in mm.











ÖZELLİKLER / SPECIFICATIONS

Yalıtım Sınıfı Insulation Class	Koruma Sınıfı Protection Class	Frekans H2
F CLASS	IP 55	50Hz
Gövde ve Pervane Malzemesi Body Material & Impeller Material	Çalışma Sıcaklığı Working Temperature	Verimlilik Sınıfı Efficiency Class
DKP Sheet Metal	-20 / +50 °C	IE2 / IE3

ÖZELLİKLER / SPECIFICATIONS

- Debi / Airflow : 4.000 – 28.000 m³/h
- Basınç / Pressure : 500–2.400 Pa
- Geriye eğik seyrek kanatlı
/ Backward curved impeller
- Direkt akuple veya kayış kasnak tahrikli
/ Direct coupling or belt driven
- Minimum motor gücüyle , max. kapasite
/ Minimum engine power – max. capacity

Model	Pa (Pa)	500 (500)	700 (700)	900 (900)	1100 (1100)	1300 (1300)	1500 (1500)	1700 (1700)	1900 (1900)	2100 (2100)	2400 (2400)
UVS-GR300	m ³ /h	4.000	1.500	-	-	-	-	-	-	-	-
UVS-GR320	m ³ /h	-	6.000	2.500	-	-	-	-	-	-	-
UVS-GR350A	m ³ /h	-	-	6.500	5.000	-	-	-	-	-	-
UVS-GR350B	m ³ /h	-	-	9.000	6.000	-	-	-	-	-	-
UVS-GR400A	m ³ /h	-	-	-	13.000	10.000	6.000	-	-	-	-
UVS-GR400B	m ³ /h	-	-	-	15.000	13.000	10.000	-	-	-	-
UVS-GR450A	m ³ /h	-	-	-	-	17.000	15.000	10.000	-	-	-
UVS-GR450B	m ³ /h	-	-	-	-	19.000	18.000	15.000	12.000	-	-
UVS-GR500A	m ³ /h	-	-	-	-	-	23.000	21.000	17.000	15.000	-
UVS-GR500B	m ³ /h	-	-	-	-	-	28.000	26.000	24.000	23.000	19.000

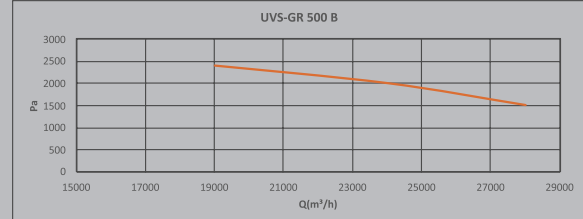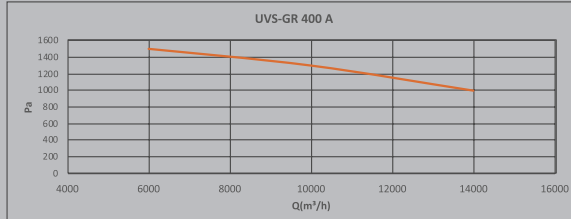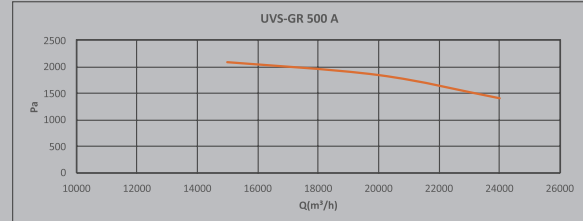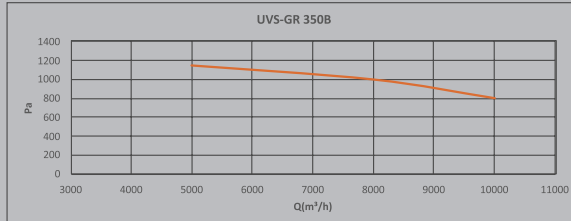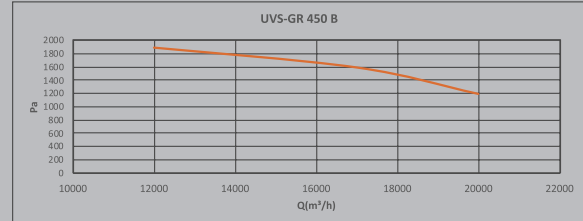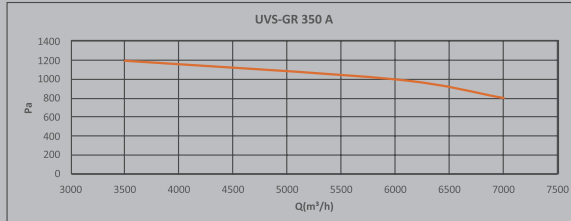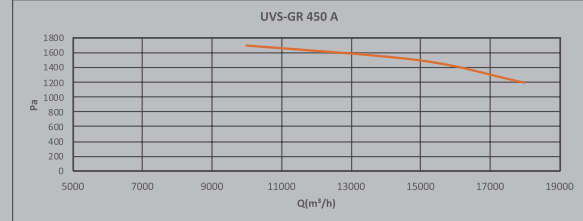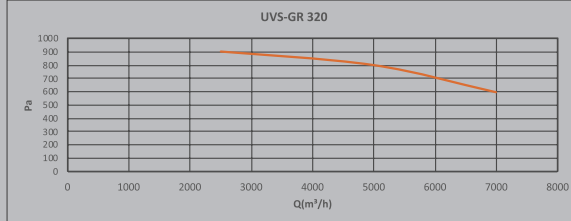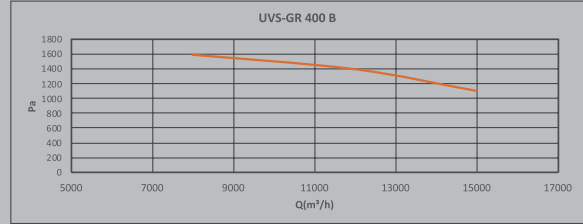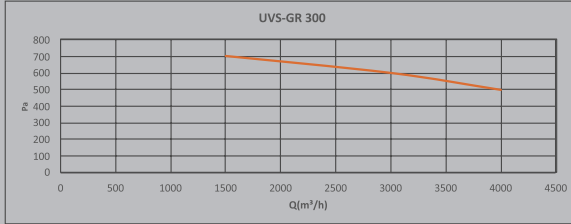

UVS-GR