

/ RADYAL FANLAR

RADIAL FANS

UVS-H HÜCRELİ RADYAL FAN
(ÖNE EĞİMLİ SIK KANATLI)
UVS-H VENTILATION UNITS
(FORWARD CURVED)



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.
YOU CAN VISIT OUR WEBSITE TO GET DETAILED
INFORMATION ABOUT THE PRODUCT.

www.uvents.com.tr


ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	Voltaj (V)	Akım (A)	Power (kW)	RPM (d/d)	Airflow (m3/h)	Basınç (Pa)	Ses dB(A)	Ağırlık (kg)
UVS-H7X7 A	230/380	3.3\1.6	0.75	1.400	2.250	400	50	69
UVS-H7X7 B	230/380	5.4\11.92	1.1	1.400	2.800	400	60	72
UVS-H9X9 A	230/380	5.4\11.92	1.1	1.400	4.200	300	60	80
UVS-H9X9 B	230/380	9.8\3.5	1.5	1.400	4.850	300	61	82
UVS-H10X10 A	230/380	9.8\3.5	1.5	1.400	5.550	300	61	89
UVS-H10X10 B	230/380	14\4.9	2.2	1.400	6.300	400	62	94
UVS-H12X12 A	230/380	14\4.9	2.2	1.400	8.200	400	62	120
UVS-H12X12 B	230/380	20\6.7	3	1.400	8.750	400	63	123
UVS-H15X15 A	230/380	20\6.7	3	1.400	11.250	300	63	138
UVS-H15X15 B	380	8.4	4	1.400	12.500	400	65	144
UVS-H18X18A	380	11.5	5.5	1.400	16.050	500	68	186
UVS-H18X18 B	380	16	7.5	1.400	18.800	500	69	193

KULLANIM ALANLARI / ÖZELLİKLERİ




AREAS OF USAGE / SPECIFICATIONS

Yalıtım Sınıfı Insulation Class	Koruma Sınıfı Protection Class	Frekans Hz
F CLASS	IP 55	50Hz
Gövde ve Pervane Malzemesi Body Material & Impeller Material	Çalışma Sıcaklığı Working Temperature	Verimlilik Sınıfı Efficiency Class
Galvaniz / Galvanized	-20 / +50 °C	IE2 / IE3

- Hücreli fanlar mahal içindeki kirli havayı dışarı atmada veya kapalı hacime taze hava basımında kullanılır.
- Bu fanlar bütün havalandırma sistemlerinde ve ses seviyesinin önemli olduğu yerlerde kullanılabilir.
- Oteller, restoranlar, hastaneler, sinema salonları, kimya, tekstil endüstrileri, matbaa vb. Kullanım alanlarından birkaçıdır.

- The cabinet fans are used for venting polluted air in the room or for enclosed bulk fresh air.
- These fans can be used in all ventilation systems where sound level is important.
- Hotels, restaurants, hospitals, movie theaters, chemistry, textile industries, printing houses etc. are a few its uses.

ÜRÜN DETAY ÇİZİMİ / PRODUCT DETAIL DRAWING

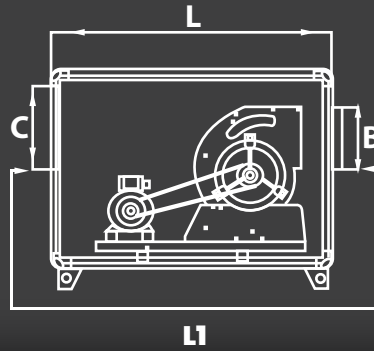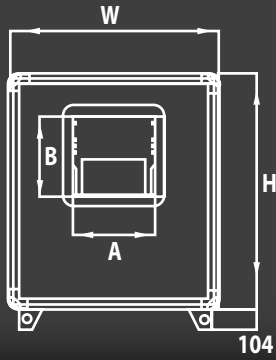


ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	L1	L	W	H	ATIŞ ÖLÇÜLERİ (OUTPUT SIZE)		EMİŞ ÖLÇÜLERİ (INPUT SIZE)	
					A	B	C	D
UVS-H7X7	1.050	850	600	600	235	205	220	520
UVS-H9X9	1.150	950	650	650	295	260	245	570
UVS-H10X10	1.250	1.050	750	750	335	290	295	670
UVS-H12X12	1.300	1.100	850	850	400	335	345	770
UVS-H15X15	1.400	1.200	900	900	485	408	370	820
UVS-H18X18	1.500	1.260	1.000	1.000	560	480	420	920

* Yukarıdaki tablodan yazan veriler mm cinsinden belirtilmiştir. All dimensions are in mm.

MODEL	Pa	200	250	300	350	400	450	500	600	700	800
UVS-H7X7 A	m³/h	2.600	2.500	2.450	2.350	2.250	2.150	2.050	1.850	1.600	1.350
UVS-H7X7 B	m³/h	3.150	3.050	3.000	2.900	2.800	2.750	2.650	2.500	2.300	2.150
UVS-H9X9 A	m³/h	4.500	4.350	4.200	4.050	3.900	3.750	3.550	3.200	2.750	2.300
UVS-H9X9 B	m³/h	5.100	4.950	4.850	4.700	4.550	4.450	4.300	4.000	3.650	3.300
UVS-H10X10 A	m³/h	6.000	5.650	5.550	5.400	5.200	5.000	4.800	4.350	3.850	-
UVS-H10X10 B	m³/h	7.200	7.000	6.900	6.800	6.300	6.150	5.950	5.650	5.250	4.850
UVS-H12X12 A	m³/h	8.550	8.500	8.450	8.300	8.200	7.250	6.950	6.250	5.500	-
UVS-H12X12 B	m³/h	9.600	9.500	9.200	9.000	8.750	8.500	8.250	7.750	7.200	6.500
UVS-H15X15 A	m³/h	11.750	11.550	11.250	10.900	10.550	10.200	9.800	8.900	7.800	-
UVS-H15X15 B	m³/h	13.300	13.000	12.700	12.400	12.500	11.850	11.550	10.850	10.050	-
UVS-H18X18A	m³/h	19.000	18.500	18.000	17.550	17.050	16.550	16.050	15.000	13.800	12.600
UVS-H18X18 B	m³/h	-	21.000	20.500	20.150	19.750	19.300	18.800	17.950	17.000	-

HÜCRELİ ASPIRATÖR YÖN ÇİZELGESİ / HÜCRELİ ASPIRATÖR YÖN ÇİZELGESİ

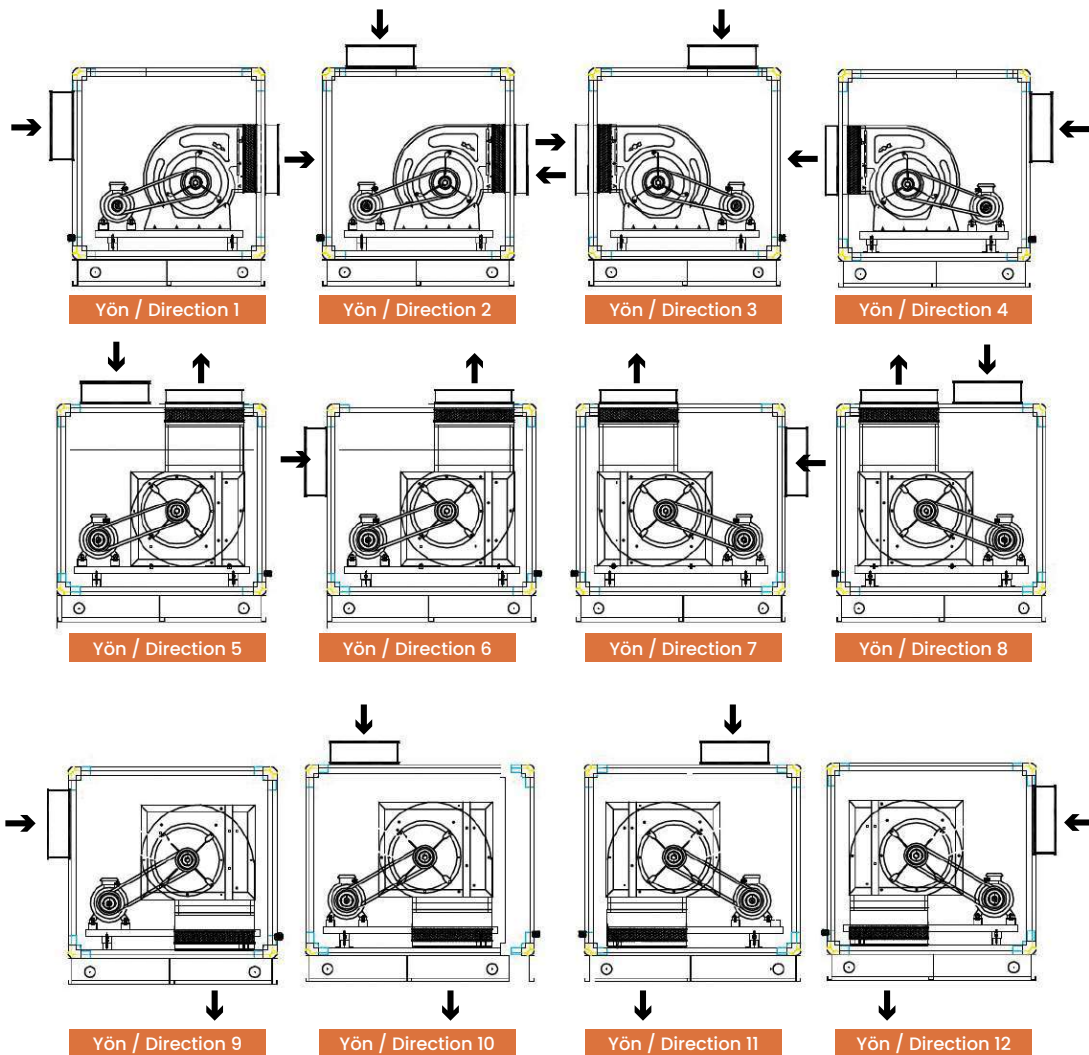

UVS-H PERFORMANS TABLOSU / UVS-H PERFORMANCE TABLE

