

/ RADYAL FANLAR RADIAL FANS

UVS-TR MALZEME NAKİL FANI (TAŞIMA) UVS-TR MATERIAL TRANSPORT FAN



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.
YOU CAN VISIT OUR WEBSITE TO GET DETAILED
INFORMATION ABOUT THE PRODUCT.

www.uvents.com.tr



* Metal Alt Şase Opsiyoneldir. / Metal Bottom Chassis is Optional.



ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	Voltaj (V)	Akım (A)	Power (kW)	RPM (d/d)	Airflow Max (m3/h)	Basınç Max (Pa)	Ses dB(A)	Ağırlık (kg)
UVS-TR5	380	4.6	2.2	2.800	1.900	4.000	82	45
UVS-TR6	380	6	3	2.800	2.200	4.500	86	56
UVS-TR7	380	8	4	2.800	2.500	5.000	88	64
UVS-TR8	380	10.5	5.5	2.800	3.000	6.000	90	85
UVS-TR9	380	14	7.5	2.800	4.000	7.250	92	90
UVS-TR10	380	21	11	2.800	6.000	7.500	95	110
UVS-TR11	380	29	15	2.800	7.500	8.000	98	125
UVS-TR12	380	36	18.5	2.800	8.000	8.500	110	150


ÖZELLİKLER / SPECIFICATIONS

Yalıtım Sınıfı Insulation Class	Koruma Sınıfı Protection Class	Frekans H2
F CLASS	IP 55	50Hz
Gövde ve Pervane Malzemesi Body Material & Impeller Material	Çalışma Sıcaklığı Working Temperature	Verimlilik Sınıfı Efficiency Class
DKP Sheet Metal	-20 / +50 °C	IE2 / IE3

KULLANIM ALANLARI / AREAS OF USAGE

- Toz toplama / Collecting dust
- İnce tanecikli malzeme naklinde (mermer tozu, tahta tozu, granül, plastic vs.) / (marble dust, granule, plastique etc.)
- Matbaalarda, kağıt, mobilya, kereste, sunta, seramik ve mermer fabrikalarında / At printing houses different factories such as textile.
- Debi / Airflow : 1.900 – 8.000 m³/h
- Basınç / Pressure : 4.000 – 8.500 Pa
- Direkt akuple veya kayış kasnak tahrikli / Direct coupling or belt driven

ÜRÜN DETAY ÇİZİMİ / PRODUCT DETAIL DRAWING

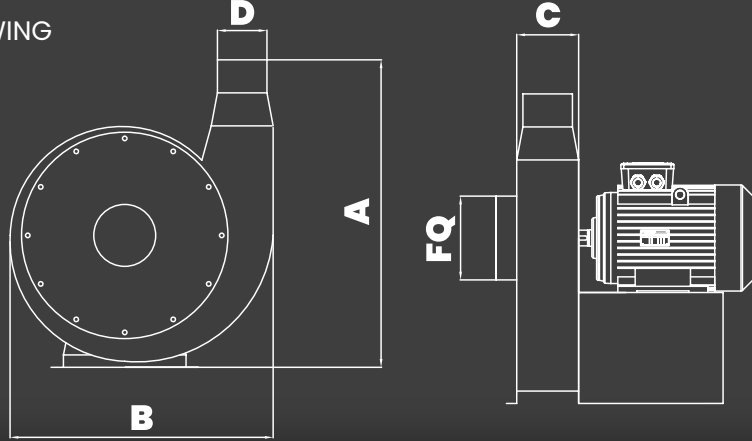

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	A	B	C	D	F
UVS-TR5	730	650	120	120	140
UVS-TR6	810	690	150	150	150
UVS-TR7	820	720	150	150	150
UVS-TR8	890	650	150	150	150
UVS-TR9	920	740	180	180	180
UVS-TR10	995	880	200	200	200
UVS-TR11	1.070	985	200	200	220
UVS-TR12	1.135	985	215	200	220

* Yukarıdaki tablodan yazan veriler mm cinsinden belirtilmiştir. / * The data written in the table above are in mm.