

## RADYAL FANLAR

### RADIAL FANS

#### UVS-OB R 260 TEK EMİŞLİ RADYAL FAN (ÖNE EĞİMLİ)

UVS-OB R 260 SINGLE INLET  
RADIAL FAN (INCLINED FORWARD)



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN  
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.  
YOU CAN VISIT OUR WEBSITE TO GET DETAILED  
INFORMATION ABOUT THE PRODUCT.

[www.uvents.com.tr](http://www.uvents.com.tr)



### ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

| Model               | Voltaj<br>(V) | Akım<br>(A) | Power<br>(kW) | RPM<br>(d/d) | Airflow<br>(m3/h) | Ses<br>dB(A) | Ağırlık<br>(kg) |
|---------------------|---------------|-------------|---------------|--------------|-------------------|--------------|-----------------|
| UVS-OB R 260M-2K    | 230           | 9.8         | 0.75          | 2.820        | 2.700             | 72           | 9.5             |
| UVS-OB R 260M-2KSYK | 230           | 9.8         | 0.75          | 2.820        | 2.700             | 72           | 9.5             |
| UVS-OB R 260M-4K    | 230           | 2.1         | 0.25          | 1.380        | 1.450             | 66           | 12.8            |
| UVS-OB R 260T-2K    | 380           | 3.3         | 0.75          | 2.820        | 2.700             | 72           | 11.2            |
| UVS-OB R 260T-2KSYK | 380           | 3.3         | 0.75          | 2.820        | 2.700             | 72           | 11.2            |
| UVS-OB R 260T-4K    | 380           | 0.81        | 0.25          | 1.380        | 1.450             | 66           | 9.8             |


### ÖZELLİKLER / SPECIFICATIONS KULLANIM ALANLARI / AREAS OF USAGE

| Yalıtım Sınıfı<br>Insulation Class | Koruma Sınıfı<br>Protection Class      | Frekans<br>H <sub>2</sub>                |
|------------------------------------|----------------------------------------|------------------------------------------|
| B CLASS                            | IP 44                                  | 50Hz                                     |
| Gövde Malzemesi<br>Body Material   | Pervane Malzemesi<br>Impeller Material | Çalışma Sıcaklığı<br>Working Temperature |
| DKP Steel Sheet                    | Galvaniz / Galvanized                  | -20 / +50 °C                             |

- Motor hava akımının dışında olmasından dolayı daha yüksek hava transferi yapılabilir. Seralar, fabrikalar, depolar, alışveriş merkezleri gibi büyük alanların havalandırılmasında kullanılır
- Due to the fact that the engine is out of air flow, higher air transfer can be done. It is used for ventilation of large areas such as greenhouses, factories, warehouses, shopping centers.

### ÜRÜN DETAY ÇİZİMİ

/ PRODUCT DETAIL DRAWING

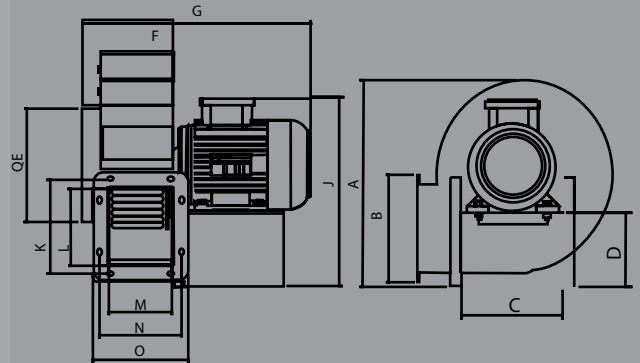

### ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

| Model        | A   | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   | N   | O   |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| UVS-OB R 260 | 361 | 194 | 155 | 119 | 197 | 128 | 405 | 327 | 162 | 162 | 137 | 115 | 140 | 163 |

\* Yukarıdaki tablodan yazan veriler mm cinsinden belirtilmiştir. / \* The data written in the table above are in mm.