

RADYAL FANLAR RADIAL FANS

UVS-PEF-H MUTFAK EGZOS FANI UVS-PEF-H KITCHEN EXHAUST FAN



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.
YOU CAN VISIT OUR WEBSITE TO GET DETAILED
INFORMATION ABOUT THE PRODUCT.

www.uvents.com.tr




ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	UVS PEF-H450	UVS PEF-H500	UVS PEF-H560	UVS PEF-H630	UVS PEF-H710	UVS PEF-H800
Max Hava Debisi m³/h Max Air Flow m³/h	3.500 m³/h	5.000 m³/h	7.500 m³/h	10.000 m³/h	15.000 m³/h	22.500 m³/h
Harici Statik Basınç External Static Pressure	500 Pa	500 Pa	500 Pa	500 Pa	500 Pa	500 Pa
Motor Gücü Motor Power	1,5 Kw	2,2 Kw	3 Kw	5,5 Kw	7,5 Kw	15 Kw
Fan Giriş Voltajı Fan Input Voltage	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50
Elektrostatik Giriş Voltajı Electrostatic Input Voltage	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz
Elektrostatik Toplayıcı Hücre Sayısı Number of Electrostatic Collector Cell	1 Adet / Pcs	2 Adet / Pcs	3 Adet / Pcs	4 Adet / Pcs	6 Adet / Pcs	9 Adet / Pcs
Kartuş Sayısı Number of Cartridges	16 Adet / Pcs	24 Adet / Pcs	32 Adet / Pcs	48 Adet / Pcs	64 Adet / Pcs	108 Adet / Pcs
Verimlilik Tek Geçiş Efficiency Single Pass	%95	%95	%95	%95	%95	%95

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	UVS PEF-H450	UVS PEF-H500	UVS PEF-H560	UVS PEF-H630	UVS PEF-H710	UVS PEF-H800
Max Hava Debisi m³/h Max Air Flow m³/h	3.500 m³/h	5.000 m³/h	7.500 m³/h	10.000 m³/h	15.000 m³/h	22.500 m³/h
Harici Statik Basınç External Static Pressure	500 Pa	500 Pa	500 Pa	500 Pa	500 Pa	500 Pa
Motor Gücü Motor Power	1,5 Kw	2,2 Kw	3 Kw	5,5 Kw	7,5 Kw	11 Kw
Fan Giriş Voltajı Fan Input Voltage	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50	380 / 3 / 50
Elektrostatik Giriş Voltajı Electrostatic Input Voltage	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz	220/50 Hz
Elektrostatik Toplayıcı Hücre Sayısı Number of Electrostatic Collector Cell	2 Adet / Pcs	2 Adet / Pcs	6 Adet / Pcs	8 Adet / Pcs	12 Adet / Pcs	18 Adet / Pcs
Kartuş Sayısı Number of Cartridges	16 Adet / Pcs	24 Adet / Pcs	32 Adet / Pcs	48 Adet / Pcs	64 Adet / Pcs	96 Adet / Pcs
Verimlilik Tek Geçiş Efficiency Single Pass	%95 - 99	%95 - 99	%95 - 99	%95 - 99	%95 - 99	%95 - 99

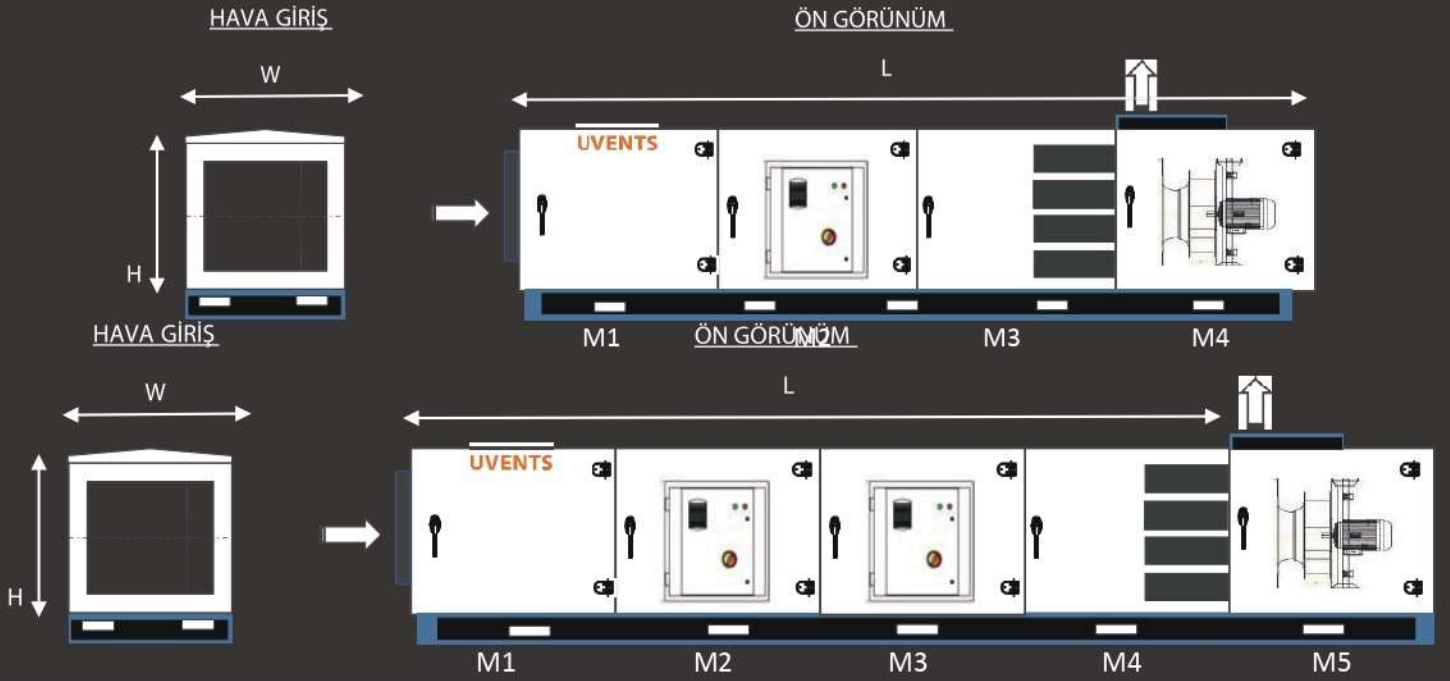

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	UVS PEF-H450	UVS PEF-H500	UVS PEF-H560	UVS PEF-H630	UVS PEF-H710	UVS PEF-H800
Yükseklik (H) mm Height (H) mm	800	800	800	1300	1300	1950
Genişlik (W) mm Width (W) mm	1020	1300	1600	1300	1600	1900
Uzunluk (L) mm Length (L) mm	3020	3020	3020	3020	3300	3300
Hava Giriş Ölçüsü mm Air Inlet Size mm	300 x 652	300 x 958	300 x 1417	600 x 958	600 x 1417	900 x 1417
Hava Çıkış Ölçüsü mm Air Outlet Size mm	300 x 652	300 x 958	300 x 1417	600 x 958	600 x 1417	900 x 1417
Ağırlık Kg Weight Kg	750	865	1035	1180	1415	1815

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	UVS PEF-H450	UVS PEF-H500	UVS PEF-H560	UVS PEF-H630	UVS PEF-H710	UVS PEF-H800
Yükseklik (H) mm Height (H) mm	800	800	800	1300	1300	1950
Genişlik (W) mm Width (W) mm	1020	1300	1600	1300	1600	1900
Uzunluk (L) mm Length (L) mm	4020	4020	4020	4020	4300	4300
Hava Giriş Ölçüsü mm Air Inlet Size mm	490 x 430	770 x 430	1190 x 430	960 x 770	1190 x 960	1149 x 1190
Hava Çıkış Ölçüsü mm Air Outlet Size mm	350 x 350	400 x 400	450 x 450	500 x 500	560 x 560	630 x 630
Ağırlık Kg Weight Kg	750	865	1035	1180	1415	1815

* Yukarıdaki tablodan yazan veriler mm cinsinden belirtilmiştir. All dimensions are in mm.