

/ RADYAL FANLAR RADIAL FANS

UVS-PY MUTFAK EGZOZ FANI
(ALÜMİNYUM GERİYE EĞİMLİ SEYREK KANATLI)
UVS-PY KITCHEN EXHAUST FAN
(ALUMINUM BACKWARD CURVED)



ÜRÜN HAKKINDA DETAYLI BİLGİ ALMAK İÇİN
WEB SİTEMİZİ ZİYARET EDEBİLİRSİNİZ.
YOU CAN VISIT OUR WEBSITE TO GET DETAIL
LED INFORMATION ABOUT THE PRODUCT.

www.uvents.com.tr



ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE


Model	Voltaj (V)	Akım (A)	Power (kW)	RPM (d/d)	Airflow Max (m3/h)	Basınç Max (Pa)	Ses dB(A)	Ağırlık (kg)
UVS-PY 400	230\380	1.10	0.55	1.400	3.300	500	74	45
UVS-PY 450	230\380	2	0.75	1.400	5.000	500	75	59
UVS-PY 500	230\380	3	1.1	1.400	7.000	600	79	80
UVS-PY 560	230\380	5.70	1.5	1.400	9.800	800	80	140

ÖZELLİKLER / SPECIFICATIONS KULLANIM ALANLARI / AREAS OF USAGE

Yalıtım Sınıfı Insulation Class	Koruma Sınıfı Protection Class	Frekans Hz
F Class	IP 54	50Hz
Body Material Impeller Material Gövde ve Çark Malzemesi	Çalışma Sıcaklığı Working Temperature	Verimlilik Sınıfı Efficiency Class
Galvaniz / Galvanized DKP Metal Sheet	-20 / +50 °C	IE2 / IE3

- Hücreli fanlar mahal içindeki kirli havayı dışarı atmada veya kapalı hacime taze hava basımında kullanılır.
- Bu fanlar bütün havalandırma sistemlerinde ve ses seviyesinin önemli olduğu yerlerde kullanılabilir.
- Oteller, restoranlar, hastaneler, sinema salonları, kimya, tekstil endüstrileri, matbaa vb. Kullanım alanlarından birkaçıdır.
- The cabinet fans are used for venting polluted air in the room or for enclosed bulk fresh air.
- These fans can be used in all ventilation systems where sound level is important.
- Hotels, restaurants, hospitals, movie theaters, chemistry, textile industries, printing houses etc. are a few its uses.

ÜRÜN DETAY ÇİZİMİ / PRODUCT DETAIL DRAWING

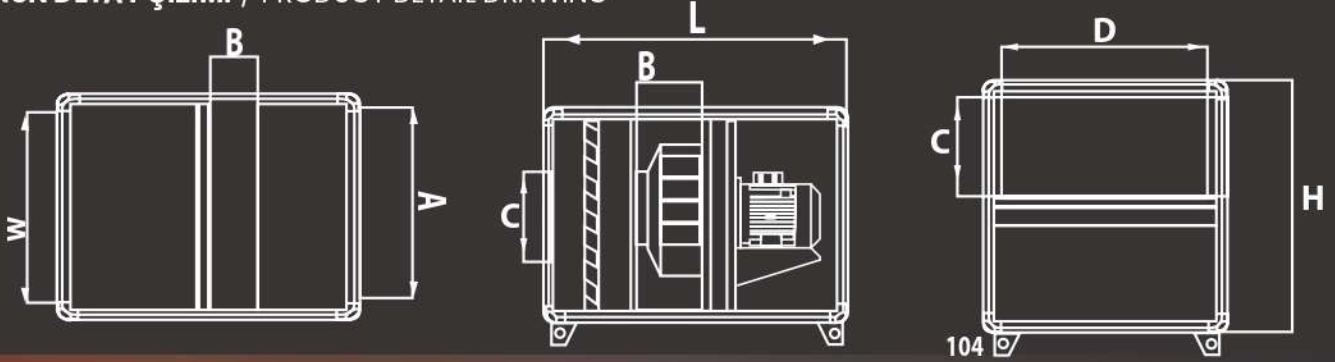

ÜRÜN DETAY TABLOSU / PRODUCT DETAIL TABLE

Model	L	W	H	ATIŞ ÖLÇÜLERİ (OUTPUT SIZE)		EMİŞ ÖLÇÜLERİ (INPUT SIZE)
				A	B	CQ
UVS-PY 400	670	675	675	250	590	280
UVS-PY 450	670	675	675	250	590	350
UVS-PY 500	750	770	770	270	690	400
UVS-PY 560	750	770	770	270	690	450

