




BYKS

CIRCULAR DUCT TYPE SILENCERS

Effectively reduces the volume of cylindrical duct-type fans. Sound shower values are designed

according to the desired capacities. Insulation thickness is 50mm.

TYPE					SOUND FALL VALUE dB(A)						
	Lnom	ød1	ød0	L	125	250	500	1k	2k	4k	8k
BYKS 100	900	100	200	960	4	15	34	50	50	48	23
BYKS 125	900	125	224	965	4	12	33	45	50	30	17
BYKS 150	900	150	250	965	4	10	28	42	43	20	15
BYKS 160	900	160	260	970	4	10	28	40	41	20	14
BYKS 200	900	200	300	985	4	8	24	32	34	13	10
BYKS 250	900	250	355	900	4	8	20	26	23	10	8
BYKS 315	900	315	415	900	3	7	16	22	12	6	7
BYKS 355	900	355	560	900	3	5	10	13	7	5	6

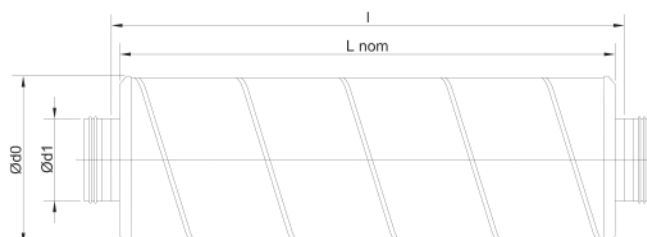

BDKS

RECTANGULAR DUCT TYPE SILENCERS

Effectively reduces the volume of the duct-type fans.

Sound shower values are designed according to the desired capacities.

TYPE			SOUND FALL VALUE dB(A)						
	B	H	125	250	500	1k	2k	4k	8k
BDKS 30-15	300	150	7	15	18	25	25	19	19
BDKS 40-20	400	200	5	9	15	23	16	12	10
BDKS 50-25	500	250	10	15	25	25	20	15	12
BDKS 50-30	500	300	8	15	20	31	17	14	11
BDKS 60-30	600	300	8	15	20	31	17	14	11
BDKS 60-35	600	350	7	13	17	18	13	10	8
BDKS 70-40	700	400	7	11	14	14	10	8	6
BDKS 80-50	800	500	6	8	10	11	8	6	3
BDKS 100-50	1000	500	6	8	10	11	8	6	3

